



AQUATANK

Basement Dewatering System

The AquaTank package pump station is designed to collect ground water via a perimeter channel or 110mm pipe and/or clear opening to the top of the chamber. The AquaTank comes with a single pump arrangement, the station can be supplied with a battery back-up system which would ensure the pump would work in a power outage.

The AquaTank can also collect grey water from showers and wash-hand basins but is not suitable for foul water from a W.C. (please see our AquaTank Foul package pump station). The AquaTank is delivered to site as a complete package, including all internal pipe work and a drainage pump. We would highly recommend that a high level alarm is fitted.

The AquaTank has been designed to ensure an easy problem free installation and is manufactured in high grade MDPE.

Features

- DPT drainer 01 or 02
- MDPE chamber 0.536M x 0.545M deep (100L)
- 1 1/4" Internal pipe work
- 1 1/4" Non-return valve
- 1 1/4" Quick release coupling
- 40mm Cable duct


Specifications

- Pump Model DPT 01/02
- Voltage 230V
- KW Rating 0.40kw / 0.75kw
- Full Load Current 1.9a / 4.0a
- Fuse Rating Spur 10 amp
- Typical Duty 2.2LS / 3M Head
- Chamber Storage 100L



- Specifically designed for ground water applications
- Simple to install
- Quiet in operation
- Various depths available

Characteristic Curves

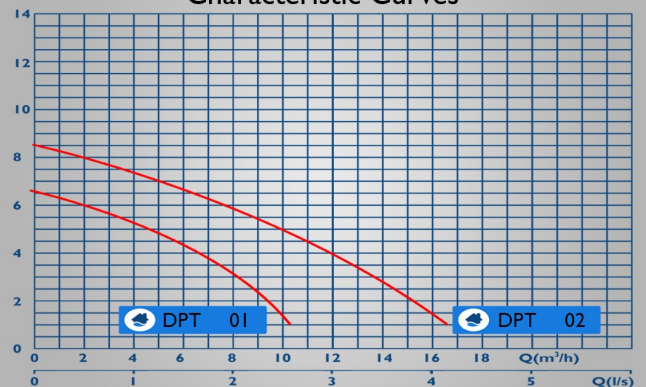

Accessories

High Level Alarm



Battery Back-up



Telemetry System



Pipe Work

